

PVC finishing profiles

Product description:


Plastic lath designed for installation in a drywall construction. It is used to clean and protect gypsum boards against damage.

Range of usage:

Profiles are used for protection of edge of gypsum-plasterboard and fibre-reinforced gypsum structures.

Characteristics:

Material	PVC (Polyvinylchloride)
-----------------	-------------------------

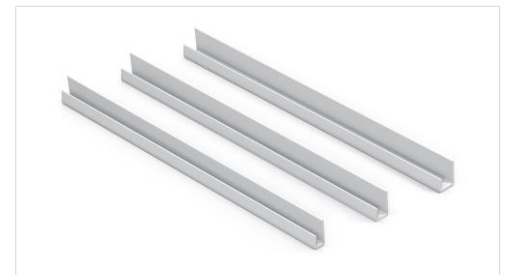

Product variability:

Code	Name	Board	Carton	Weight
TMD-0258-Z (1.348504.1 T)	PVC finishing profile 09.5 - 2.5 m	9.5 mm	50 pcs	1.33 kg
TMD-0259-Z (1.348504.2 T)	PVC finishing profile 09.5 - 3.0 m	9.5 mm	50 pcs	1.59 kg
TMD-0262-Z (1.348505 T)	PVC finishing profile 12.5 - 2.5 m	12.5 mm	50 pcs	1.38 kg
TMD-0263-Z (1.348506 T)	PVC finishing profile 12.5 - 3.0 m	12.5 mm	50 pcs	1.65 kg
TMD-0264-Z (1.348507 T)	PVC finishing profile 15.0 - 2.5 m	15 mm	50 pcs	1.78 kg
TMD-0265-Z (1.348508 T)	PVC finishing profile 15.0 - 3.0 m	15 mm	50 pcs	2.08 kg

Real weight may vary in range of +/-5% according to ČSN EN10143

Mounting:

The profiles is possible to slide or clip onto the edge of gypsum board.

Packaging:

Product is packed in bundles of 10 pcs and then in brown carton box which contains of 5 bundles – 50 pcs.

Recommended storage:

The product is required to store in dry and temperate environment

