

## Sanitary support for double faucet and drain pipe

### Product description:

Sanitary support for double faucet and drain pipe is construction element which is produced by compression molding and sheet metal sections of "C" shape. The metal profiles are attached to side plate-by welding and thus form two sliding spacers. To maintain the required resistance in humid environments, both structures are after welding protected with yellow (standard) or blue (on request) galvanized zinc. Fasteners provide attachment to the structure and fixing spacers.

### Range of usage:

The product is used for mounting the double faucet and pipe into the vertical structure of the building. The bracket can be used in masonry, plasterboard or wood construction.


### Characteristics:

<b>Identification code</b>	1.348310 T
<b>Order code</b>	TMD-0225
<b>Name</b>	RKB-03 support for faucet and pipe
<b>Packaging</b>	1 pc (440x130x40 mm)
<b>Weight</b>	1,20 kg
<b>Permissible load</b>	-
<b>Material</b>	Rolled sheet, drawn steel
<b>Coating</b>	Yellow/blue zinc (ČSN ISO 4520)
<b>Thickness</b>	3.00 mm (ČSN EN 10143)
<b>Reaction to fire</b>	Class A1 (EN 14195)
<b>Durability</b>	Class B
<b>Hazardous substance</b>	NPD

Real weight may vary in range of +/-5% according to ČSN EN10143

### Mounting:

Unpack the individual parts and assemble them according to the instruction manual. Put the complete structures into the prepared wall opening and stretch the brackets to whole width. Using the side plates and fasteners anchor the construction to CW profiles, masonry or wooden beams. Tight the safety screw to fix the bracer's movement. Set the spacing and location of plates by a water pipe and tight it as well. Block the opening so only the pipe input is visible. Finish the surface and attach the devices.

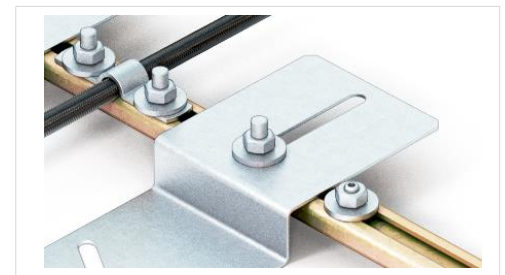

# Sanitary support for double faucet and drain pipe

## Packaging:

The sanitary support is packed unassembled in a carton box which is labeled with identification tag. The manual for mounting and assembly is included.

## Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.

## Technical drawing:

